

AdS-TS


Sensor de temperatura agua y aceite analógico tipo NTC 150°C




CARACTERÍSTICAS

Resistencia 25°C	3KΩ
Terminales	2
Conector	Mini-Timer
Llave de ajuste	19mm
Rosca	M12x1.5
Peso	26g

CURVA CARACTERÍSTICA

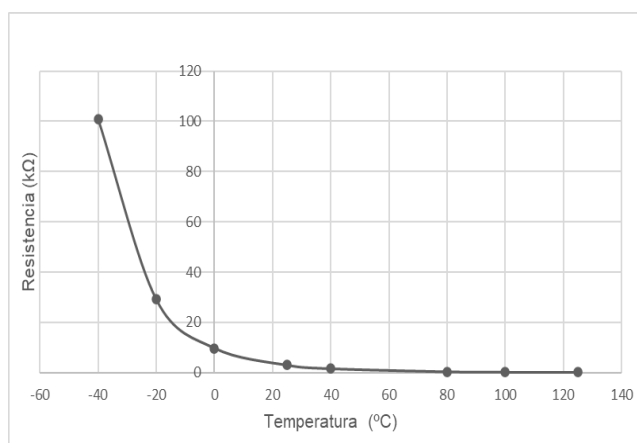

AdS-0510B Sensor de Presión 10 Bar

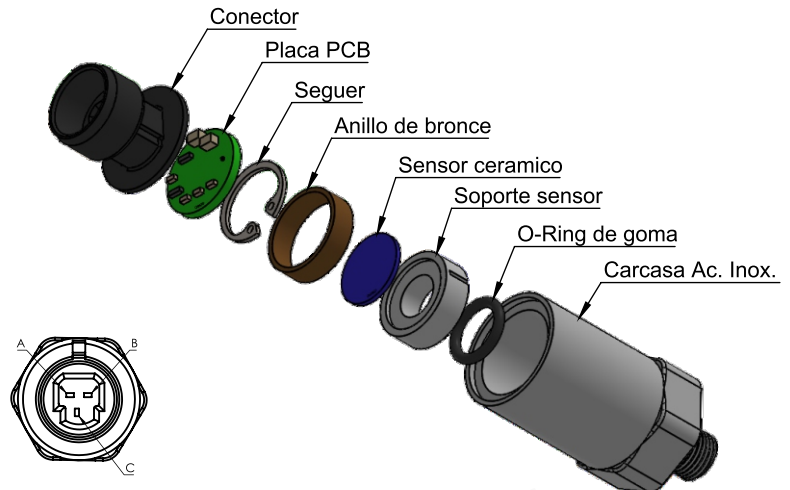

CALIBRATION CERTIFICATE

Pressure Transmitter

Specifications		Unit	Results												
Pressure Range		bar	0-10												
Supply Voltage		VDC	☐ 24; ☒ Other: 5												
Output Signal@FS		V	☒ 0.5-4.5; ☐ Other:												
Combined Error		%FS	☒ 0.5; ☐ 1.0; ☐ Other:												
Overload Pressure		%FS	☐ 120; ☒ 150; ☐ Other:												
Long-term Stability		%FS/Year	± 0.5												
Shock			20g sinusoidal, 11msec												
Vibrations		Hz/10g	5-2000 in the x-y-z directions												
Working Temperature		°C	-20~+80												
IP Rating			☒ IP67; ☐ IP65; ☐ IP45;												
Pressure Type			☒ Gauge; ☐ Absolute;												
Pressure Connection Type		☒ G1/4; ☐ G1/2; ☐ R1/4; ☐ NPT1/4; ☐ M20x1.5; ☐ 7/16-20UNF female; ☐ Other:													
Electrical Connection	Packard plug		<table><tr><td>Pin A</td><td>Define GND</td><td>Cable Black</td></tr><tr><td>Pin B</td><td>Vcc(+)</td><td>Red</td></tr><tr><td>Pin C</td><td>Signal(+)</td><td>Blue/Green</td></tr><tr><td></td><td>Shield</td><td>Yellow</td></tr></table>	Pin A	Define GND	Cable Black	Pin B	Vcc(+)	Red	Pin C	Signal(+)	Blue/Green		Shield	Yellow
	Pin A	Define GND	Cable Black												
	Pin B	Vcc(+)	Red												
	Pin C	Signal(+)	Blue/Green												
	Shield	Yellow													
Hirschmann		<table><tr><td>Pin 1</td><td>Define Vcc(+)</td><td>Cable Red</td></tr><tr><td>Pin 2</td><td>GND</td><td>Black</td></tr><tr><td>Pin 3</td><td>Signal(+)</td><td>Blue/Green</td></tr><tr><td></td><td>Shield</td><td>Yellow</td></tr></table>	Pin 1	Define Vcc(+)	Cable Red	Pin 2	GND	Black	Pin 3	Signal(+)	Blue/Green		Shield	Yellow	
Pin 1	Define Vcc(+)	Cable Red													
Pin 2	GND	Black													
Pin 3	Signal(+)	Blue/Green													
	Shield	Yellow													
Aviation plug		<table><tr><td>Pin 1</td><td>Define Vcc(+)</td><td>Cable Red</td></tr><tr><td>Pin 2</td><td>Signal(+)</td><td>Blue/Green</td></tr><tr><td>Pin 3</td><td>GND</td><td>Black</td></tr></table>	Pin 1	Define Vcc(+)	Cable Red	Pin 2	Signal(+)	Blue/Green	Pin 3	GND	Black				
Pin 1	Define Vcc(+)	Cable Red													
Pin 2	Signal(+)	Blue/Green													
Pin 3	GND	Black													
Direct lead	<table><tr><td>Vcc+:(Red)</td><td></td></tr><tr><td>Signal+:(Blue/Green)</td><td></td></tr><tr><td>GND:(Black)</td><td></td></tr><tr><td>Shield:(Yellow)</td><td></td></tr></table>			Vcc+:(Red)		Signal+:(Blue/Green)		GND:(Black)		Shield:(Yellow)					
Vcc+:(Red)															
Signal+:(Blue/Green)															
GND:(Black)															
Shield:(Yellow)															
Calibrated By															

CARACTERÍSTICAS

Nombre	Ad-0510B	
Rango de Presión	0-10 Bar	
Tensión de Alimentación	5V dc	
Voltaje de Salida	0.5 - 4.5V	
Conector de Rosca	G1/4	
Precisión	0.5% F.S	
Temperatura	85°C	
Resistencia 25°C	100MΩ	
Llave de ajuste	Rosca de 24mm	
Conector	Packard	
Terminales	3	
Pines	Pin A	GND
	Pin B	Vcc
	Pin C	Signal

